



Massive Outdoor LED Display Solution



XMPRO400 Series | XMP320 Series
XMS250 Series | XMS480 Series

www.xiv-tec.com

X-MPRO 400 Series

Features:

- Module Size 400 x 300mm with sealed aluminum case
- Durable and stable aluminum frame
- Common Frame Size 800 x 1200mm
- Cable free with dual sockets
- Support front & rear service

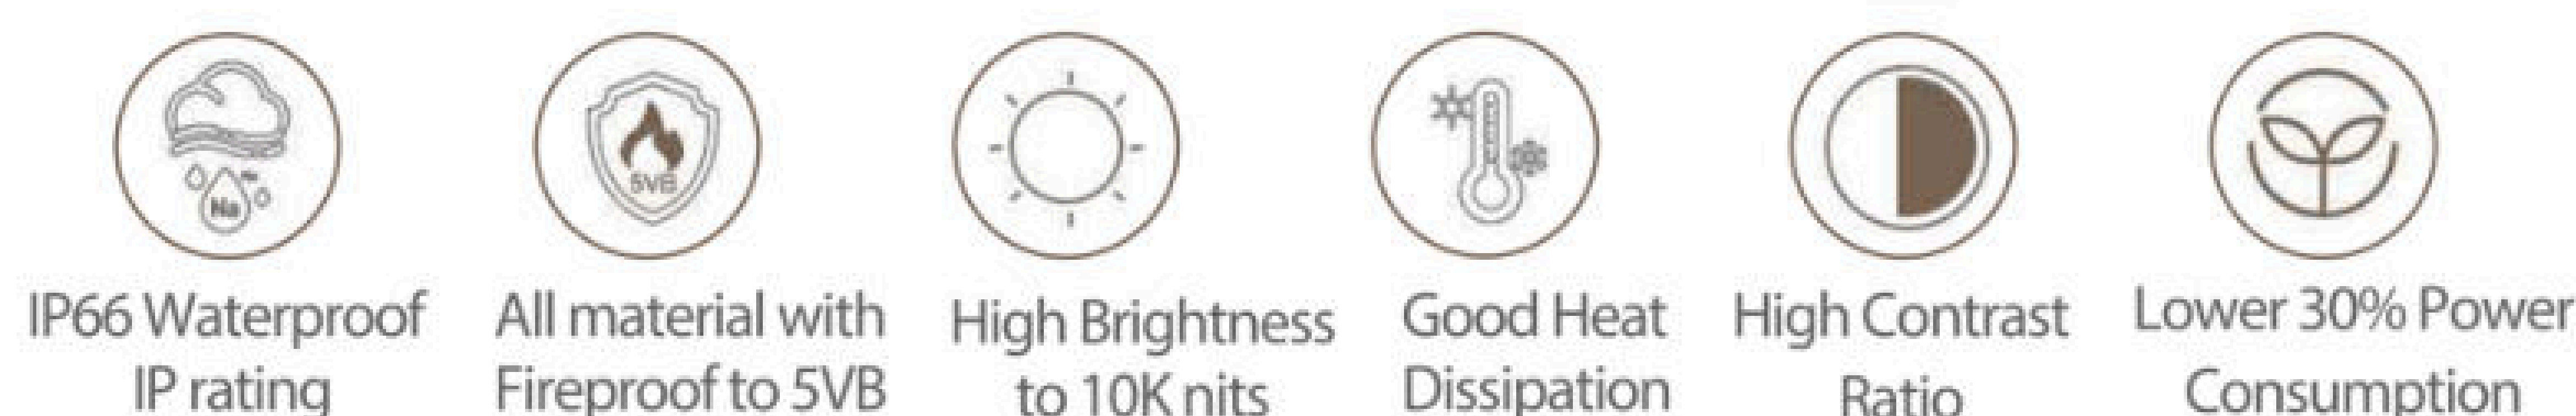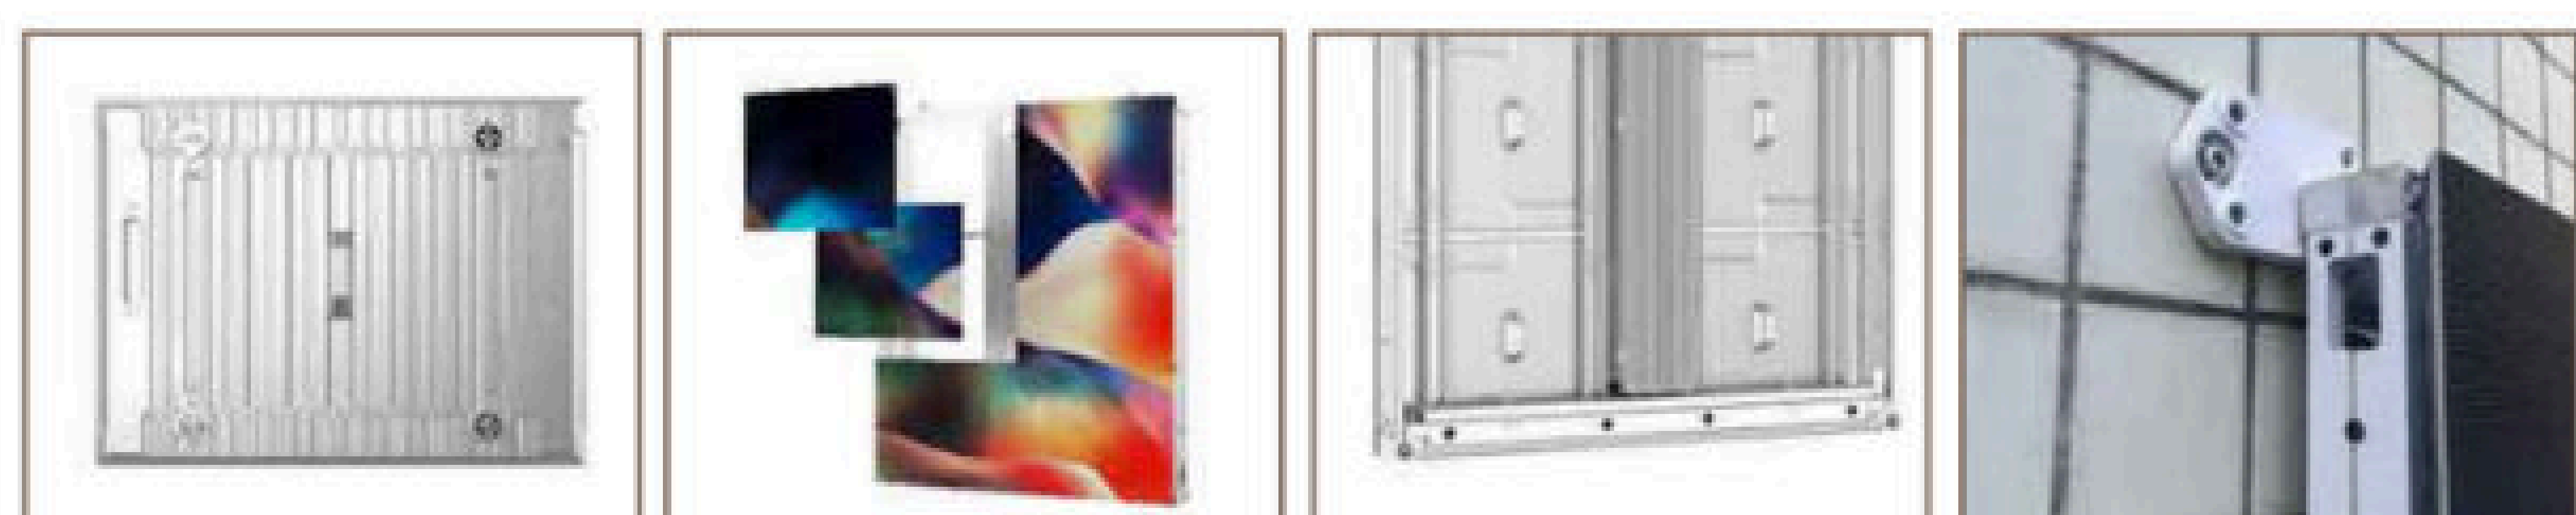

SPECIFICATION

Item Number	XMPRO6.67	XMPRO10
Pixel Pitch (mm)	6.67	10
Pixel Density (dot/m ²)	22,500	10,000
LED sealing Type	SMD2727	SMD3535
Module Resolution (PX* PX)	60*45	40*30
Module Size (mm * mm)	400 x 300	400 x 300
Cabinet Size (mm * mm)	800 x 1200	800 x 1200
Cabinet Weight (Kg)	30	30
Brightness (cd/m ²)	6,000-9,000	6000-10,000
Refresh Rate (Hz)	≥3840	≥3840
Grey Scale (bit)	≥14	≥14
Average Power consumption (W/m ²)	580W/m ²	550W/m ²
Max Power consumption(W/m ²)	175W/m ²	165W/m ²
Maintenance Type	Front & Rear	Front & Rear
Protecting Level	IP66/IP66	IP66/IP66
Certificate	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC



X-MP 320 Series

Features:

- Module Size 320 x 320mm with sealed aluminum case
- Available Pitches P6.67, P8, P10
- Front & Rear Service & Maintenance
- Support Energy Saving



More Options Frame Size (W x L):
1280 x 1280mm/960 x 960mm/960 x 1280mm

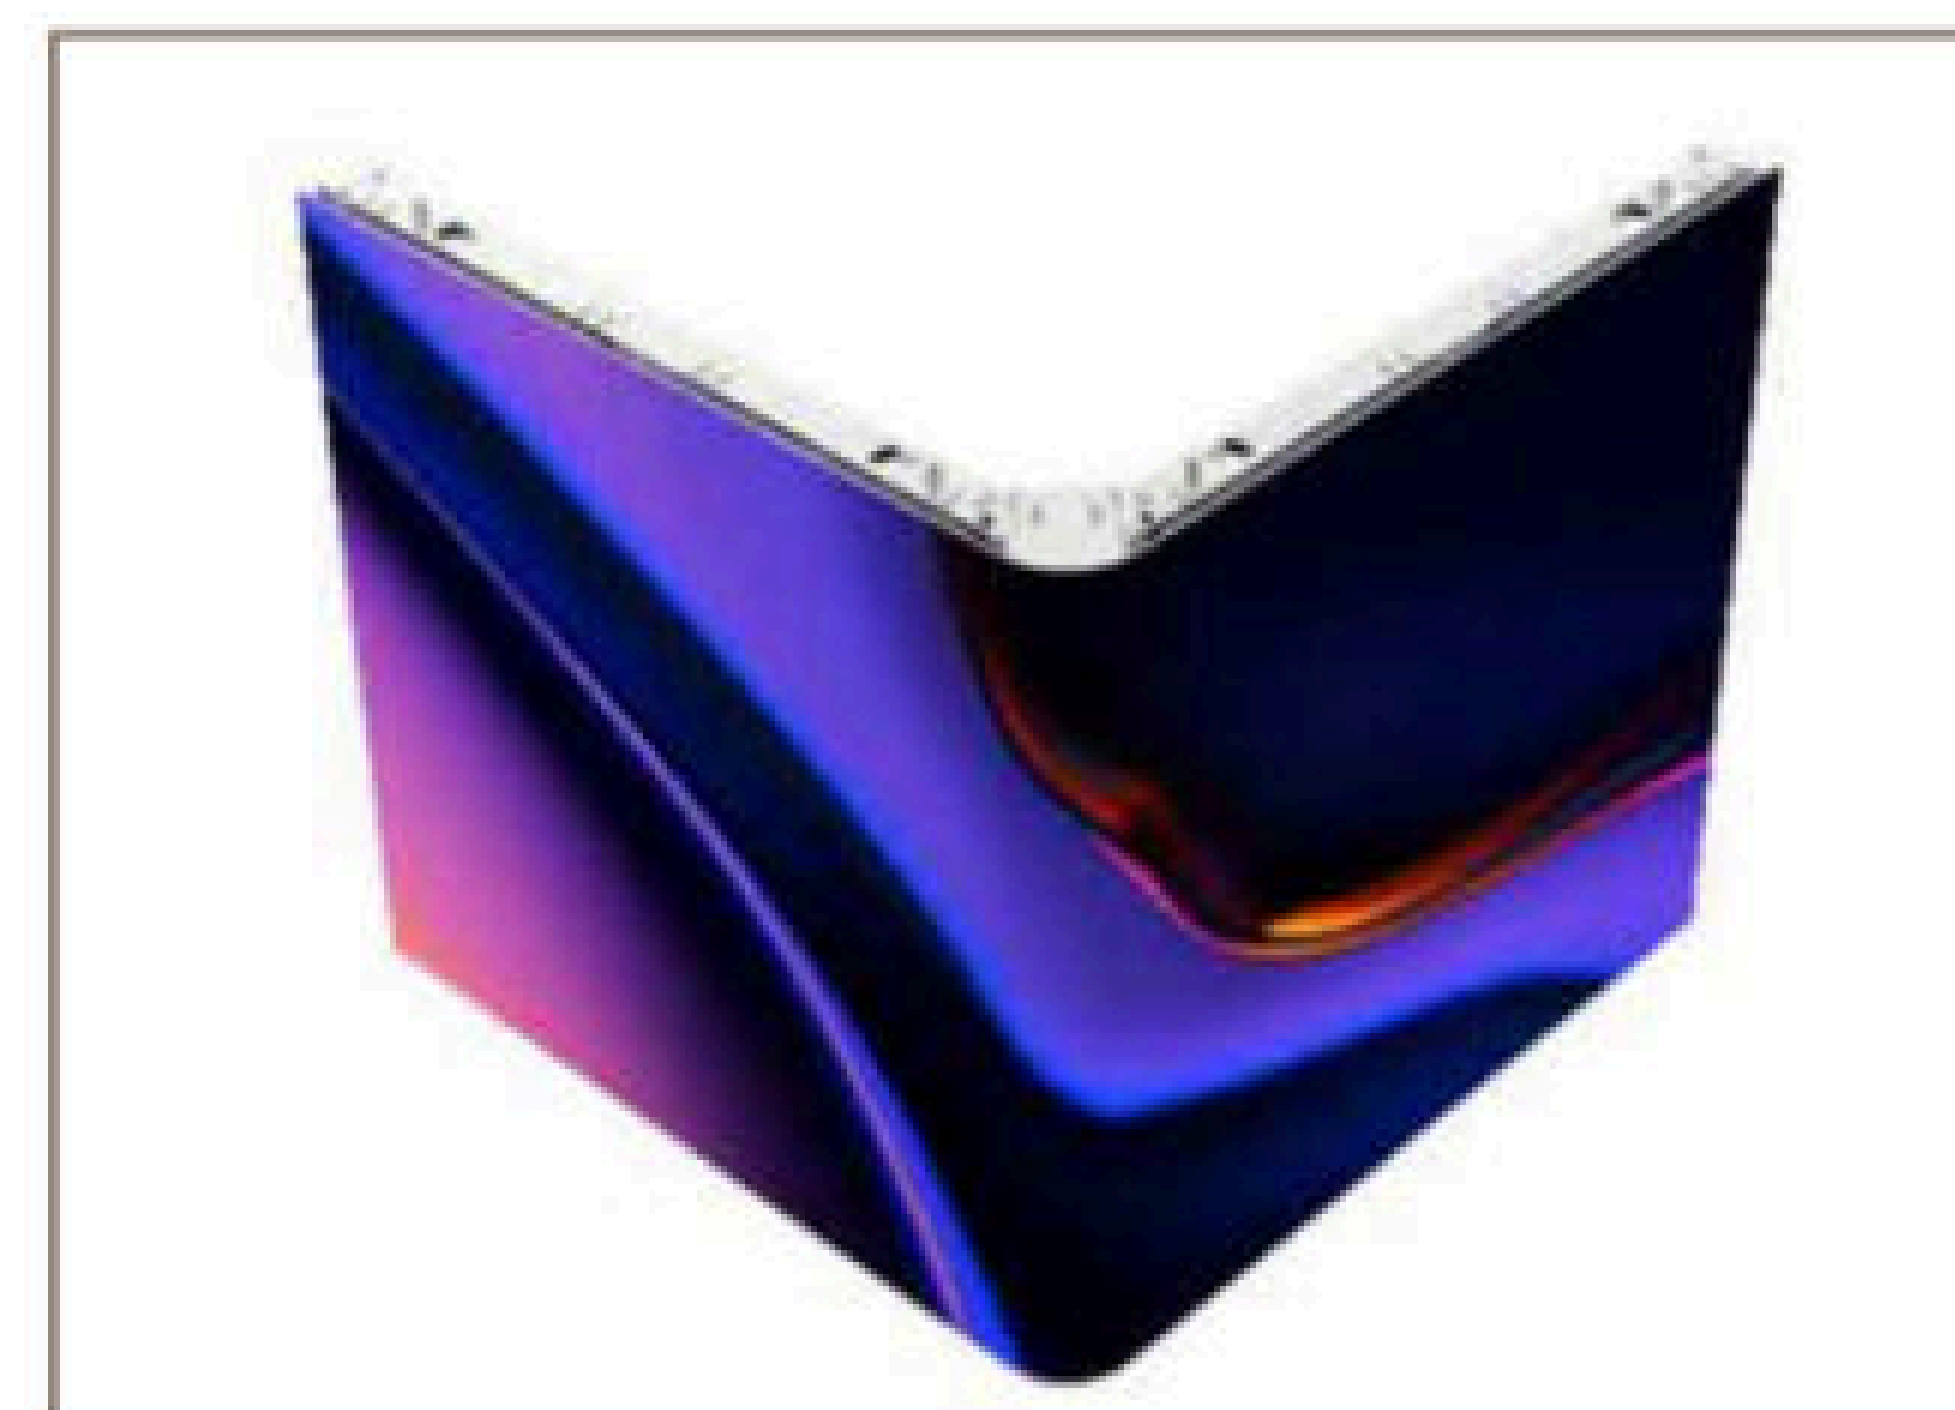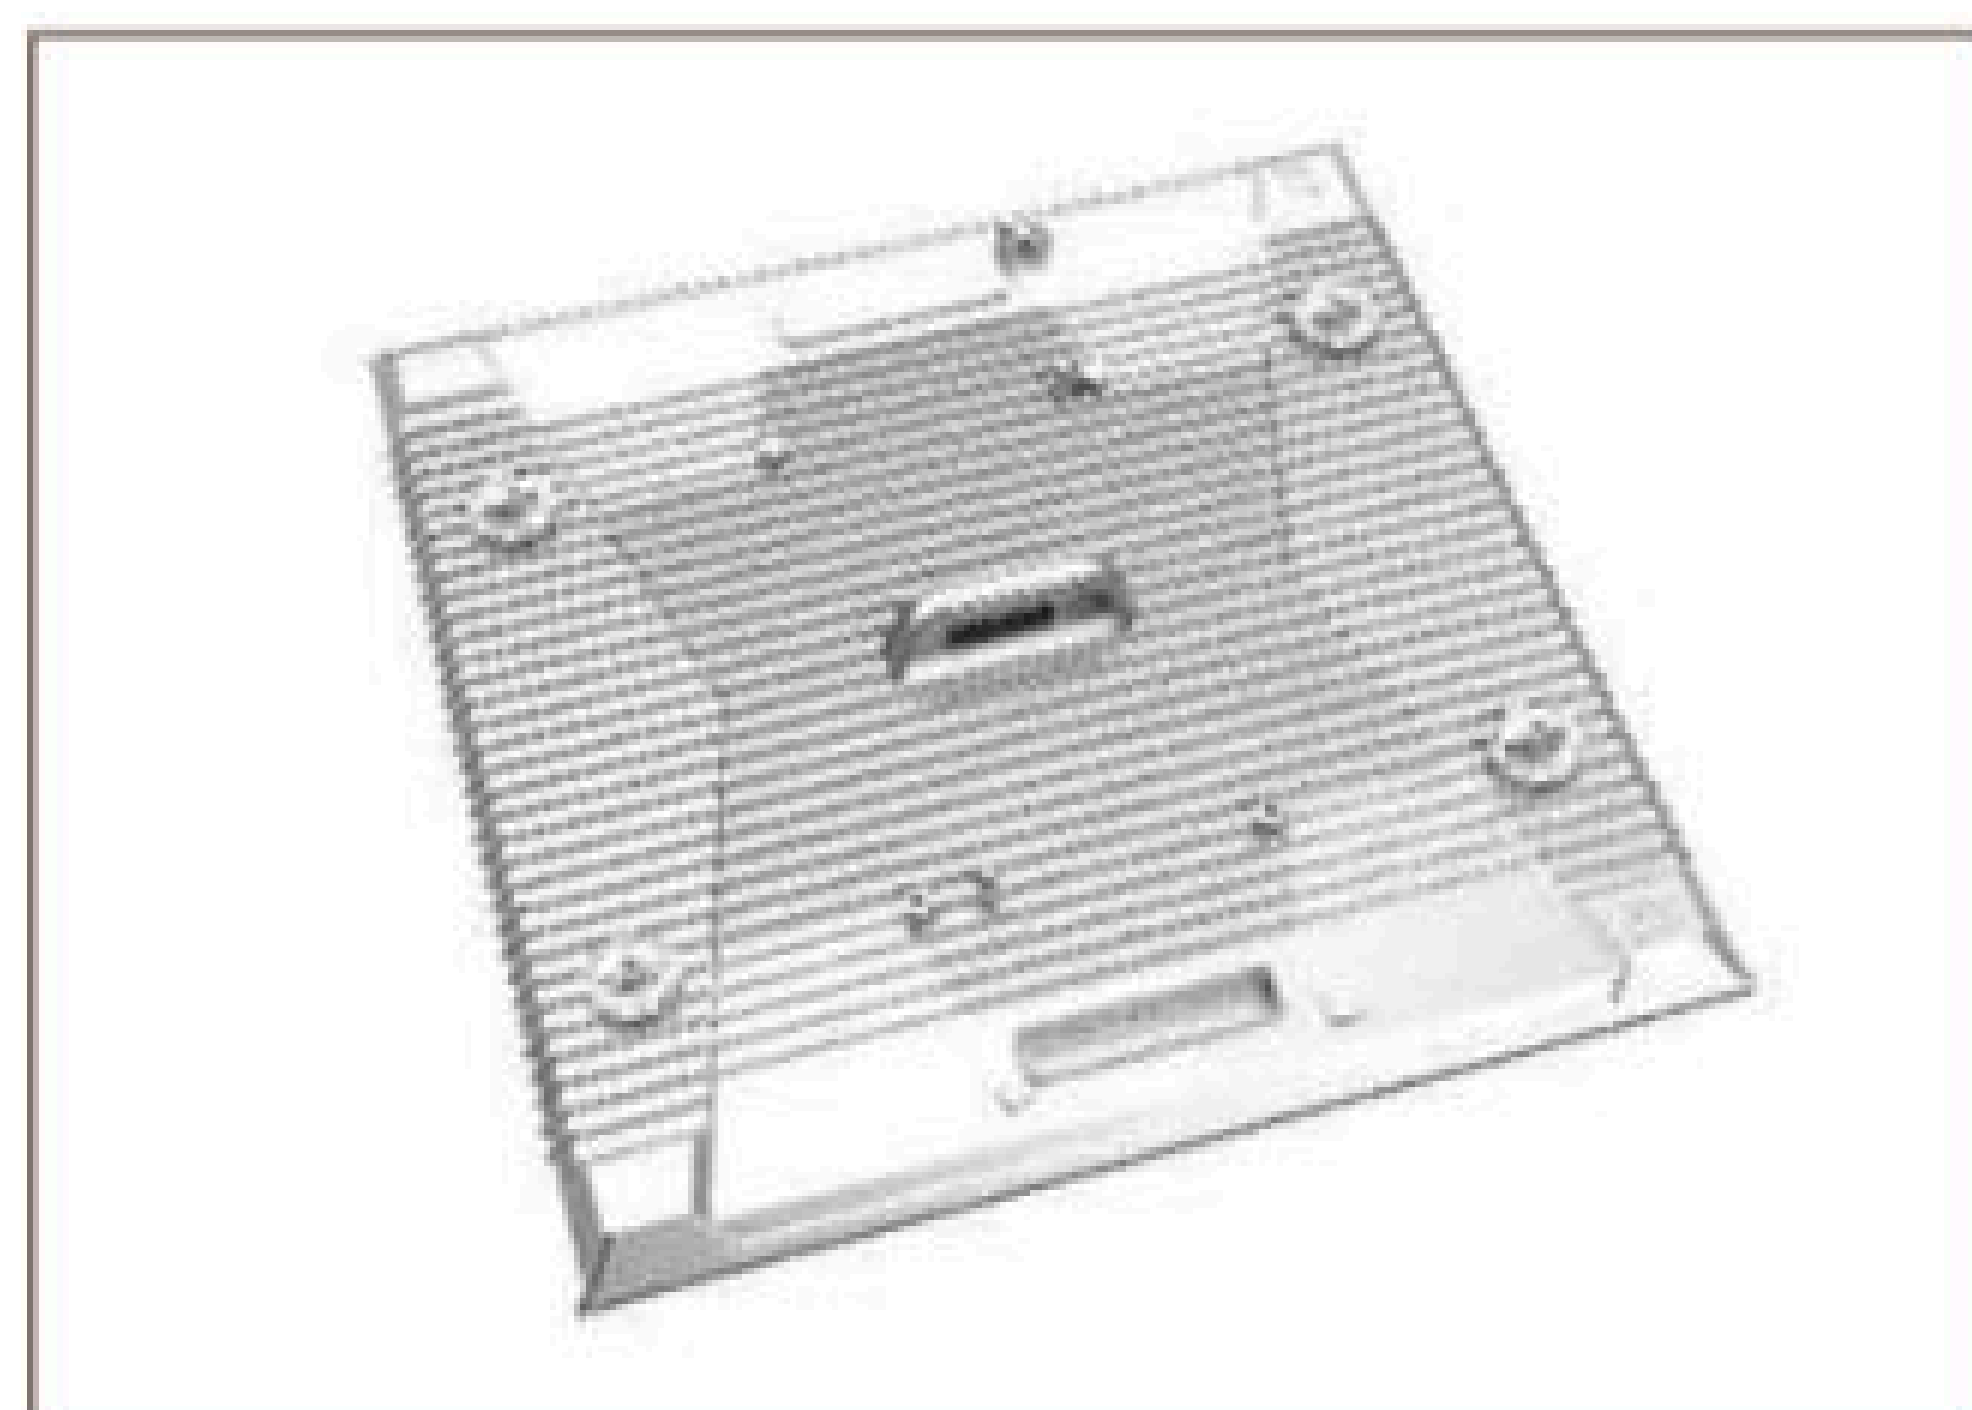

SPECIFICATION

Item Number	XMP6.67	XMP8	XMP10
Pixel Pitch (mm)	6.67	8	10
Pixel Density (dot/m ²)	22,500	15,625	10,000
LED sealing Type	SMD2727	SMD3535	SMD3535
Module Resolution (PX* PX)	48*48	60*40	32*32
Module Size (mm * mm)	320 x 320	320 x 320	320 x 320
Cabinet Size (mm * mm)	1280 x 960	1280 x 960	1280 x 960
Cabinet Weight (Kg)	30	30	30
Brightness (cd/m ²)	6,000-9,000	6000-10,000	6000-10,000
Refresh Rate (Hz)	≥3840	≥3840	≥3840
Grey Scale (bit)	≥14	≥14	≥14
Average Power consumption (W/m ²)	205W/m ²	205W/m ²	205W/m ²
Max Power consumption(W/m ²)	680W/m ²	680W/m ²	680W/m ²
Maintenance Type	Front & Rear	Front & Rear	Front & Rear
Protecting Level	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC

X-MS 250 Series

Features:

- Module Size 250 x 250mm & 500 x 250mm
Die-casting Aluminum sealed case design
- Available Pitches P2.9/P3.9/4.8
- Support 45 degree splicing
- Front & Rear Service & Maintenance



More Options Frame Size (W x L):
500 x 500mm/500 x 1000mm



SPECIFICATION

Item Number	XMS2.9	XMS3.9	XMS4.8
Pixel Pitch (mm)	2.9	3.9	4.8
Pixel Density (dot/m ²)	112,896	65,536	43,264
LED sealing Type	SMD1515	SMD1921	SMD1921
Module Resolution (PX* PX)	84*84	128*64	104*52
Module Size (mm * mm)	250 x 250	500 x 250	500 x 250
Cabinet Size (mm * mm)	500 x 500	500 x 1000	500 x 1000
Cabinet Weight (Kg)	9.5	17	17
Brightness (cd/m ²)	3500-4500	4800-7000	4800-7000
Refresh Rate (Hz)	≥3840	≥3840	≥3840
Grey Scale (bit)	≥14	≥14	≥14
Average Power consumption (W/m ²)	210W/m ²	195W/m ²	195W/m ²
Max Power consumption(W/m ²)	700W±3%/m ²	650±3%W/m ²	650±3%W/m ²
Maintenance Type	Front & Rear	Front & Rear	Front & Rear
Protecting Level	IP66	IP66	IP66
Certificate	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC



X-MS 480 Series

Features:

- Module Size 480 x 320
Die-casting Aluminum sealed case design
- Available Pitches P5.7/P6.67/P8/P10
- Support 45 degree splicing
- Front & Rear Service & Maintenance



More Options Frame Size (W x L):
960 x 640mm/960 x 1280mm/1440 x 960mm
/1440mm x 640mm

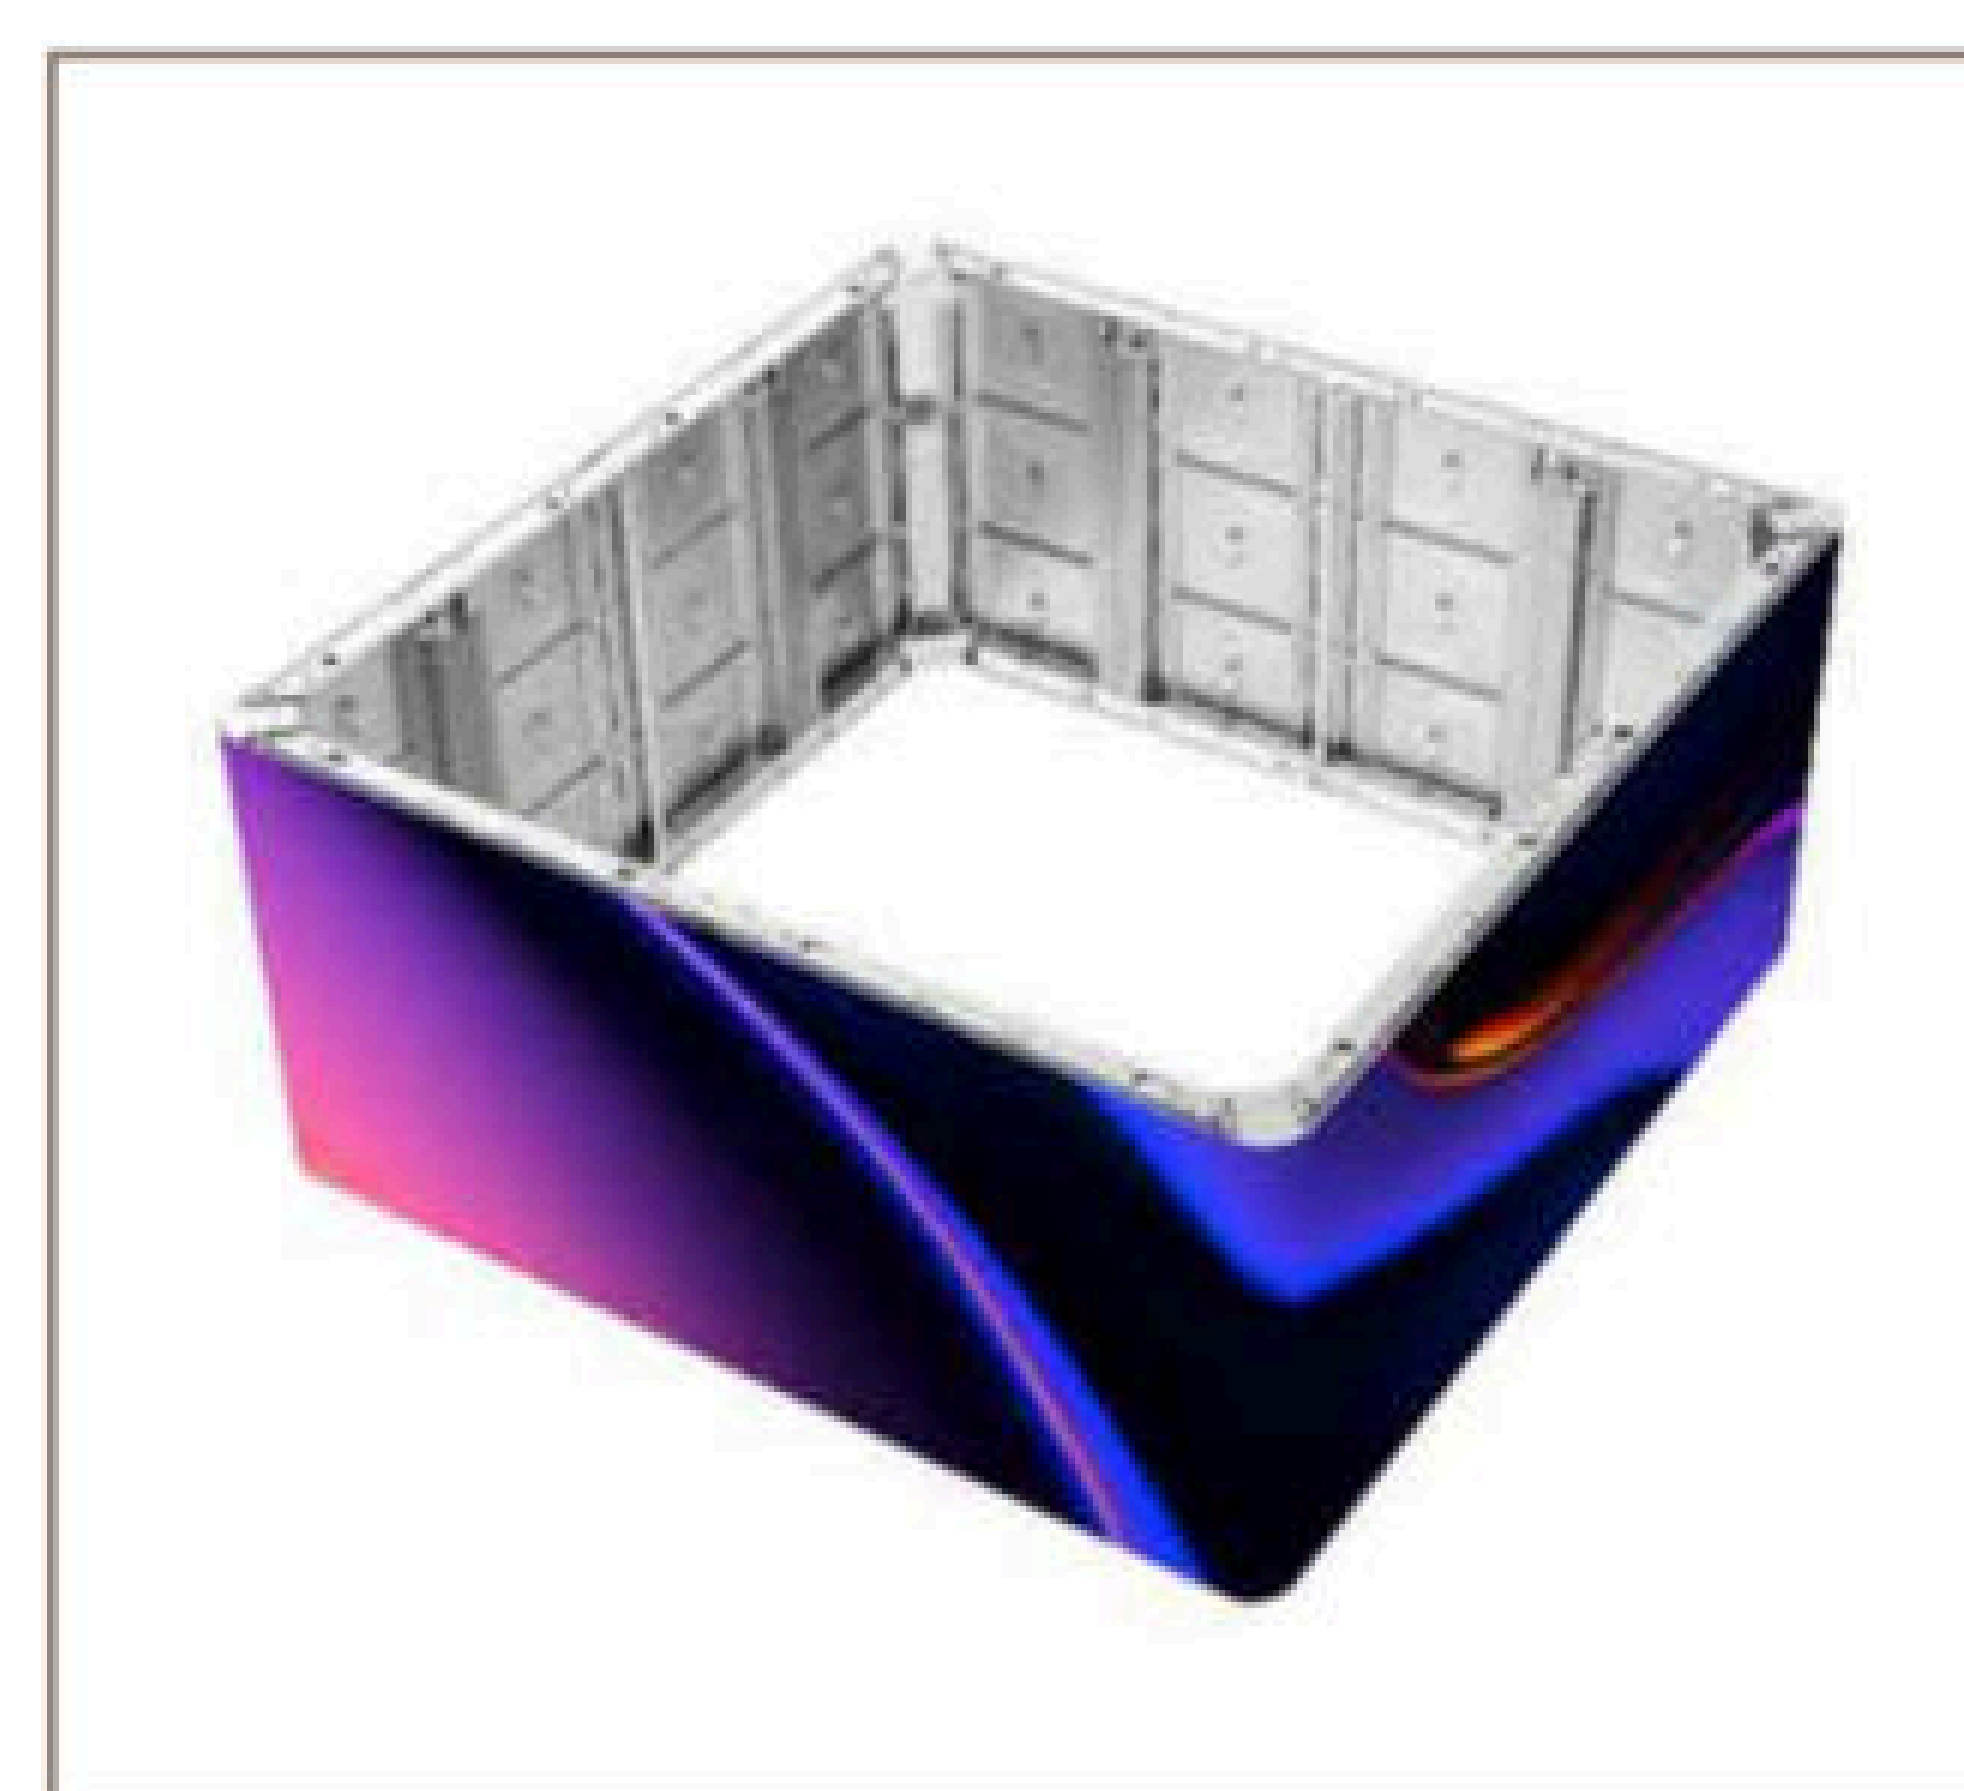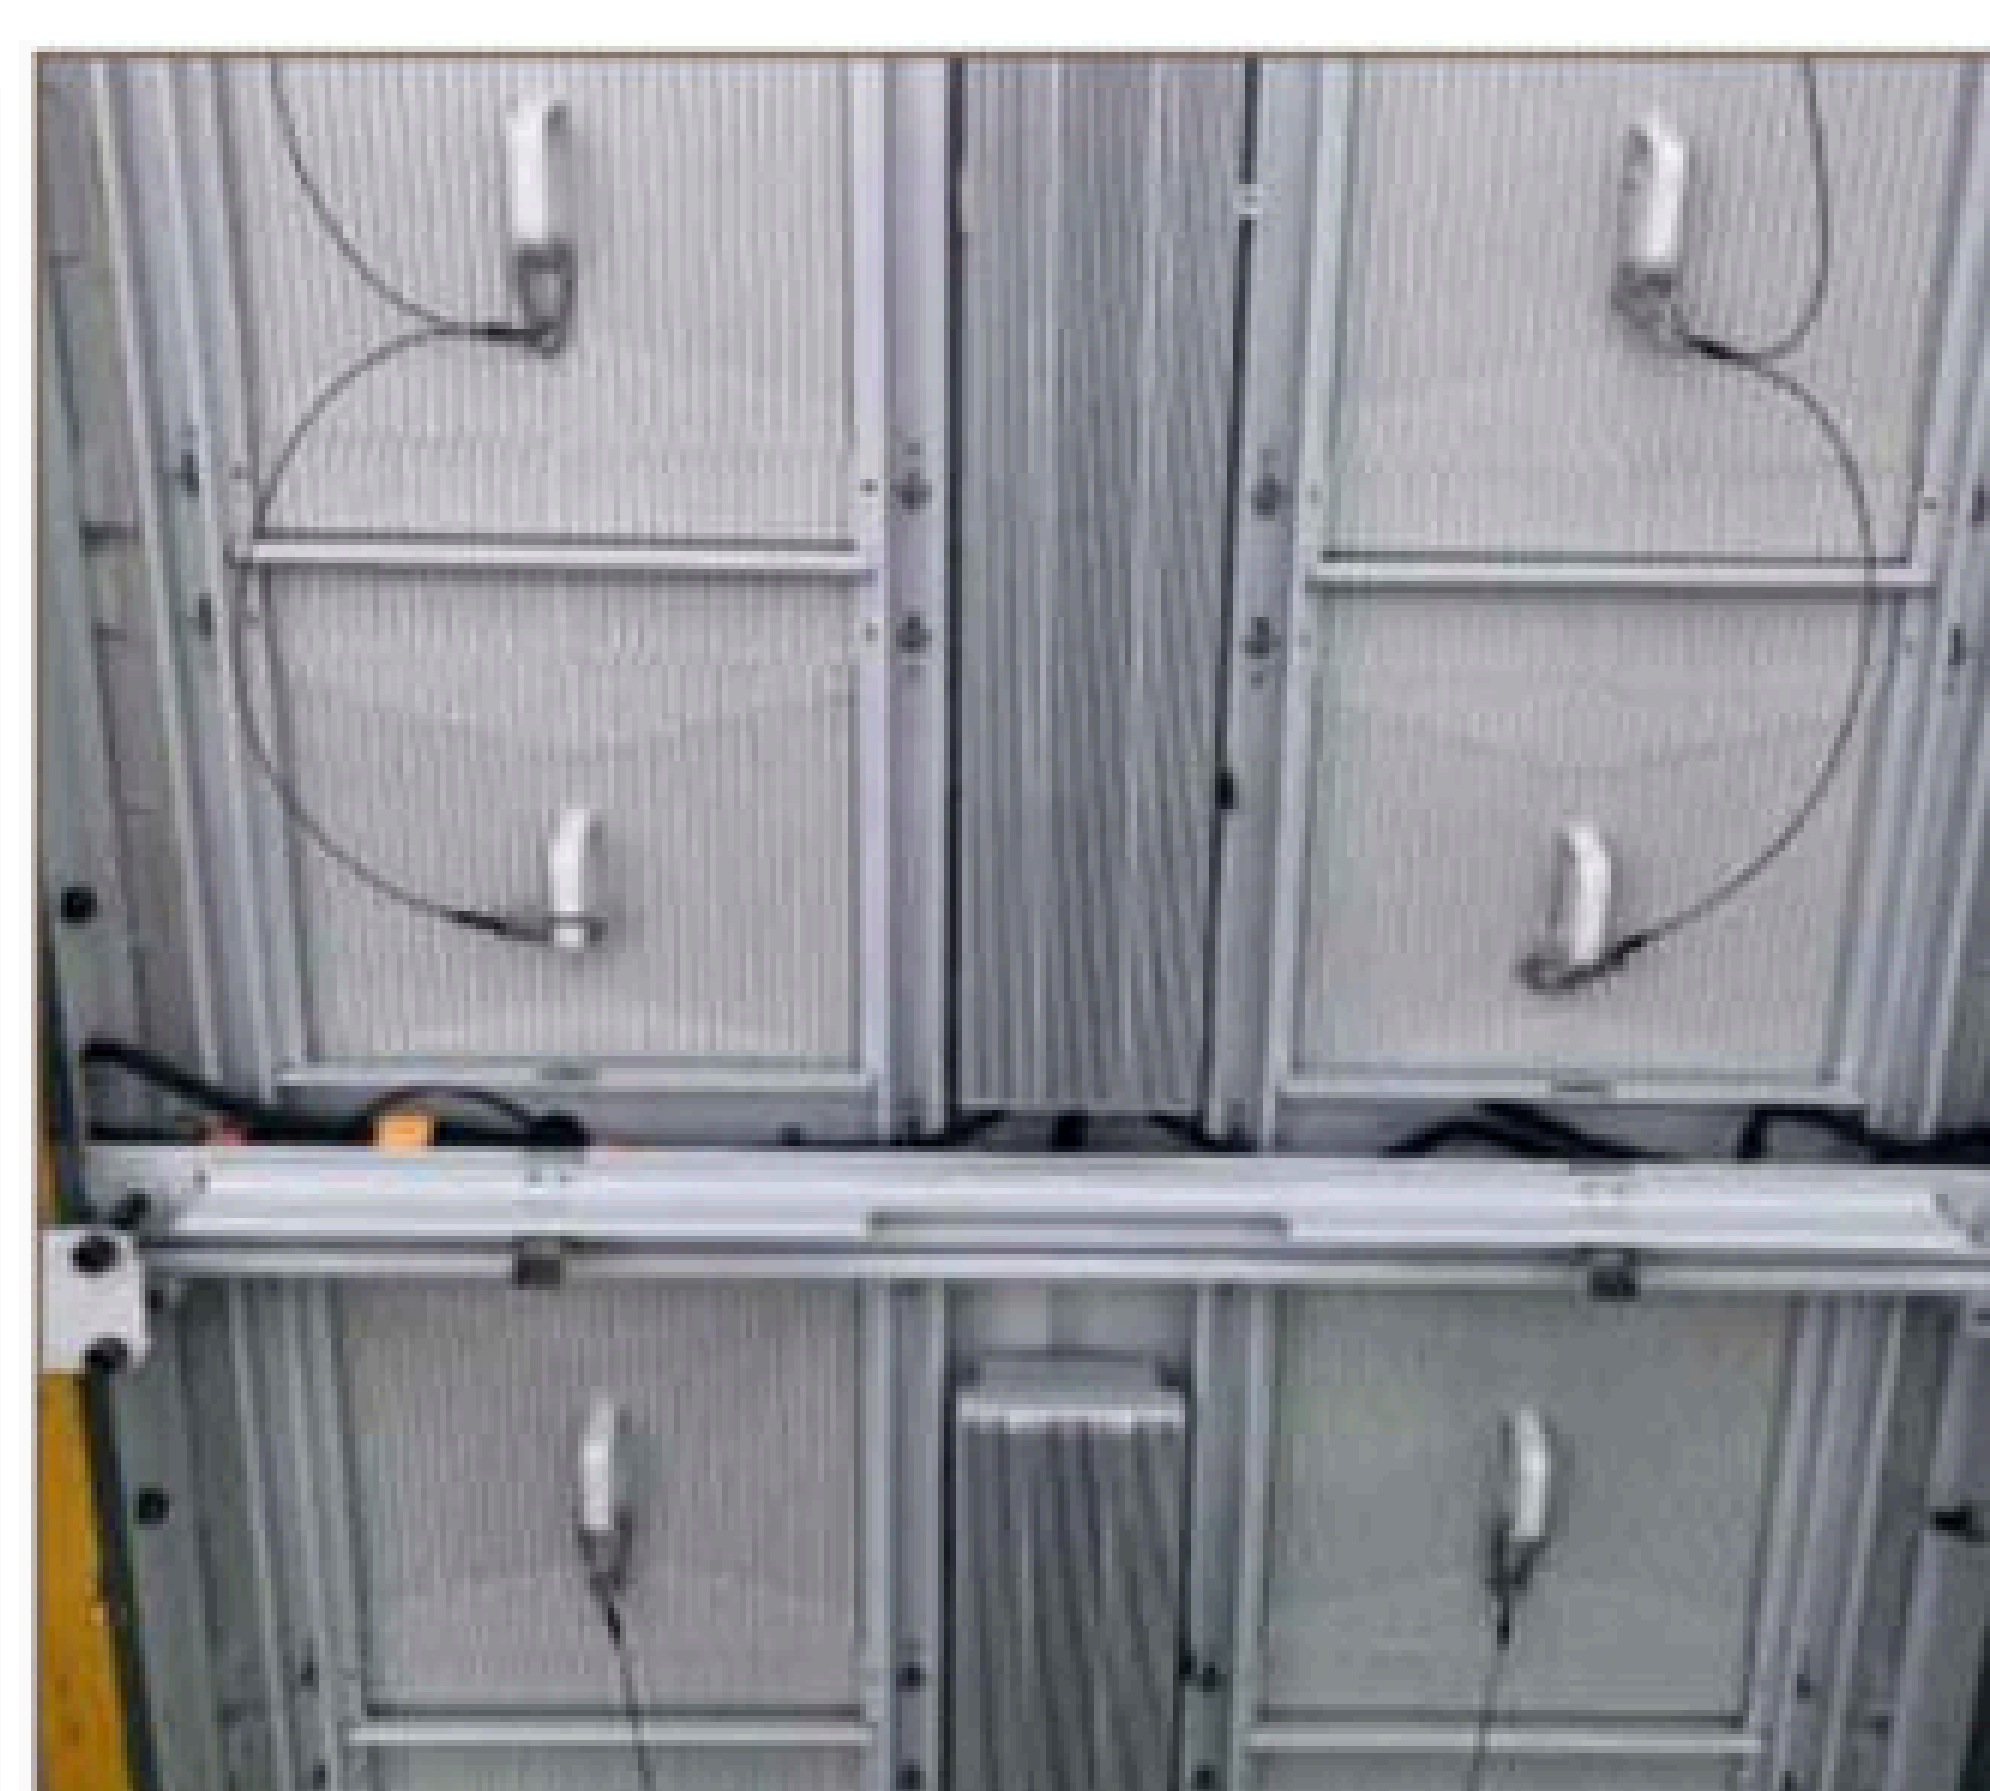

SPECIFICATION

Item Number	XMS5.7	XMS6.67	XMS8	XMS10
Pixel Pitch (mm)	5.7	6.67	8	10
Pixel Density (dot/m ²)	30,625	22,500	15,625	10,000
LED sealing Type	SMD2727	SMD3535	SMD3535	SMD3535
Module Resolution (PX* PX)	85*56	72*48	60*40	48*32
Module Size (mm * mm)	480 x 320	480 x 320	480 x 320	480 x 320
Cabinet Size (mm * mm)	960 x 960	960 x 960	960 x 960	960 x 960
Cabinet Weight (Kg)	28	28	28	28
Brightness (cd/m ²)	6,000-9,000	6000-10,000	6000-10,000	6000-10,000
Refresh Rate (Hz)	≥3840	≥3840	≥3840	≥3840
Grey Scale (bit)	≥14	≥14	≥14	≥14
Average Power consumption (W/m ²)	175W/m ²	175W/m ²	165W/m ²	165W/m ²
Max Power consumption(W/m ²)	580W/m ²	580W/m ²	550W/m ²	550W/m ²
Maintenance Type	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Protecting Level	IP66/IP66	IP66/IP66	IP66/IP66	IP66/IP66
Certificate	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC	CE/FCC/ETL/EMC



✉ info@xiv-tec.com

📍 Building 4A-303, Huiye Hi-Tech Industry Park,
Fenghuang Str. Guangming District, Shenzhen, China

CE  RoHS  us