



**XIV**  
**Holographic**  
Indoor Front Service

Shenzhen XIV Amaterasu Innovation Technology Co., Ltd.

Add: DGX industry park, Jiangzao village, Jiangzao town, zhuji city, Zhejiang province China

Tel: 0575-87688555 Fax: 0575-87688116

# Holography Brings You New Vision Of The Future Holographic Led Screen



Long Life



Highlight



Fireproofing



CE



CCC

## Product Feature

### 1. Built-in 3D VR Visual Effect:

When playing holographic, 3D video, it comes with 3D and VR visual effects.

### 2. Green energy saving:

Ultra-low static power drive design, more than 50% energy saving than the conventional screen.

### 3. Ultra-thin design:


The screen is only 1.7mm thick and weighs less than 2kg.

### 4. Ultra transparent

Transparency  $\geq 80\%$ , can be integrated in the application environment.

### 5. No steel construction:

Modular combination installation design, can be adsorbed on the glass.

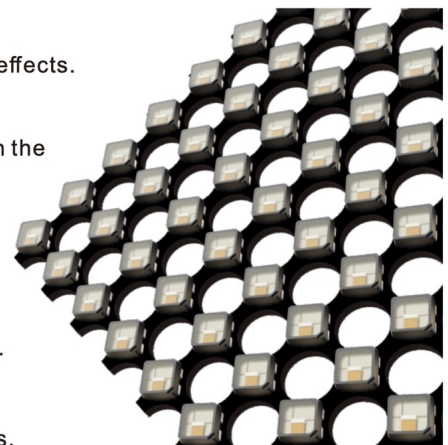

Shenzhen XIV Amaterasu Innovation Technology Co., Ltd.

Add: DGX industry park, Jiangzao village, Jiangzao town, zhuji city, Zhejiang province China

Tel: 0575-87688555 Fax: 0575-87688116

## Product Parameter

### Holographic Led Screen Product Parameter

Pixel Pitch(mm)	P2.5	P3.91	P6.25	P10
Pixel Density	160000dot/m <sup>2</sup>	65536dot/m <sup>2</sup>	25600dot/m <sup>2</sup>	10000dot/m <sup>2</sup>
Display size(mm)	125*1000	250*1000/250*1175 250*1475	250*1175/250*1475	250*1000
Outline Size(mm)	125*1000	250*1025/250*1200 250*1500	250*1200/250*1500	250*1000
Cabinet Resolution	50*400	64*256/64*300	40*188/40*236	25*120
Brightness	≥1200	≥3000	≥5000	≥4000
Weight (kg/set)	1.65	1.6	1.6	1.2
Max.Power	800W/m <sup>2</sup>	1000W/m <sup>2</sup>	1000W/m <sup>2</sup>	1000W/m <sup>2</sup>
Ave.Power	300W/m <sup>2</sup>	375W/m <sup>2</sup>	375W/m <sup>2</sup>	375W/m <sup>2</sup>
Transparency	≥70%	≥80%	≥90%	≥85%
Scan	Single point single control, static drive			
Led Control System	Synchronous/Asynchronous			
Operation Power	AC 100-240V 50-60Hz			
IP Rating	IP 20			
Gray Scale	16 bits			
Work Environment	Working Temperature:-20°C ~ 50°C Working Humidity:20%-85%RH			
Life	10,0000H			

